
# **CURV 500® INSTALL**CONFERENCE MEDIUM BUNDLE / 8 SATELLITES AND 1 SUBWOOFER





#### **CURV 500° IAMP**

4-CHANNEL CLASS D INSTALLATION AMPLIFIER

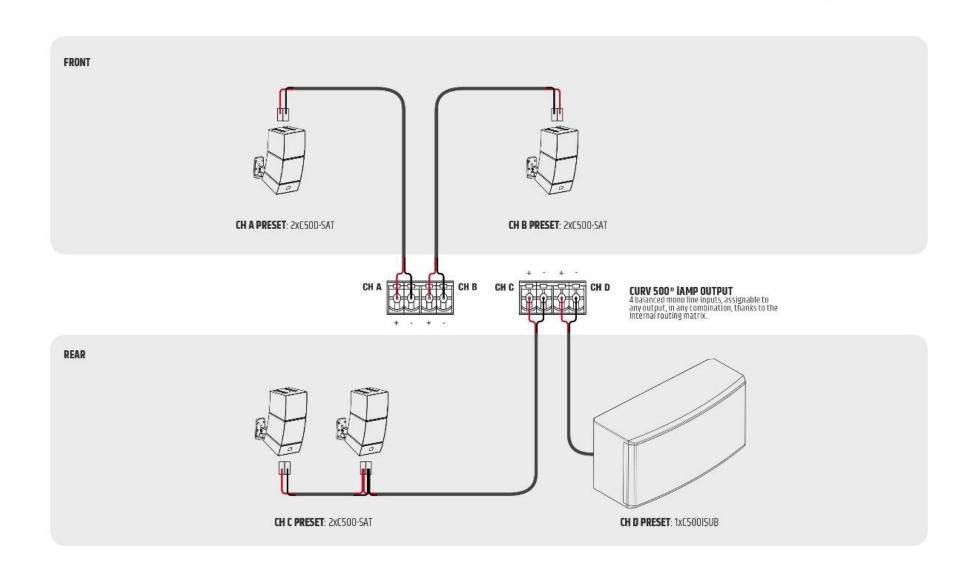

- Purpose-designed for CURV 500® installations
- Low-profile 1U 19" rackmount construction
- Drives up to 24 CURV 500® satellites per bridged output in 70V mode
- Single push encoder operation
- High-contrast OLED display
- · Temperature controlled low-noise fan
- · High-efficiency switch mode power supply
- Only 6.8 kg

#### CURV 500° iSUB (W)

10" INSTALLATION SUBWOOFER 200 W IN BLACK OR WHITE

- 10" bass reflex construction
- Purpose-designed for CURV 500® installations
- Shallow-depth enclosure
- · 200 watts RMS power handling
- 47 150 Hz frequency response
- · Available in black or white textured paint finish
- · Includes low-profile wall and ceiling mounting bracket

## **CURV 500° S2 (W)**

TWO ARRAY SATELLITES FOR THE CURV 500® ARRAY SYSTEM IN BLACK OR WHITE



- · Bundle consisting of two array satellites
- · Compact cabinet made of black die-cast aluminium, rugged and resilient
- A single 4-inch midrange driver and three 1-inch high-frequency drivers with patented WaveAhead® technology delivers excellent sound
- SmartLink® system allows for cable-free assembly of up to four array satellites
- 16 ohm impedance per satellite

### **CURV 500° SLA (W)**

SMARTLINK® ADAPTER IN BLACK OR WHITE



- 2 x 16 mm flange for an optimised dispersion angle
- · 4 x M6 threads for wall mounting
- 4 x M3 threads for ceiling mounting
- 4 rubber feet for desktop applications
- · Speakon-compatible connection for usual speaker cables
- · Rotating logo for ceiling mounting
- 2 pole Euro Style terminal block connector (2 x 1.5 mm<sup>2</sup> speaker cable recommended)



CURV 500° WMB (W)

WALL MOUNTING BRACKET FOR CURV 500° SATELLITES IN BLACK OR WHITE

L

1

8

Δ

4